






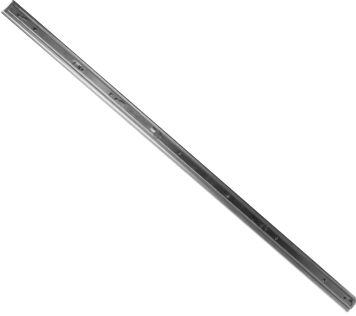

1

Synology Rail Kit is designed for installing your RackStation or RackStation expansion unit in a rack. This installation guide contains instructions on how to install Synology Rail Kit Sliding and secure your RackStation in a rack.

## Package Content

	<b>Rack mount slide x 2</b>
	<b>Long bracket (front) X 2</b>
	<b>Long bracket (rear) X 2</b>
	<b>Short bracket X 4</b>
	<b>Black screw for installation x 10</b>
	<b>Washer used with black screws x 10</b>
	<b>Long screw for the rack x 4</b>


**Note:** The above content contains items most likely used for installation. Other screws and washers in the package might also be used for various types of racks.

2

## Install the Rack Mount Slide

The rack mount slide consists of three parts (shown below):

- 1 The outer channel
- 2 The inner channel inside the outer channel
- 3 The sliding rail inside the inner channel

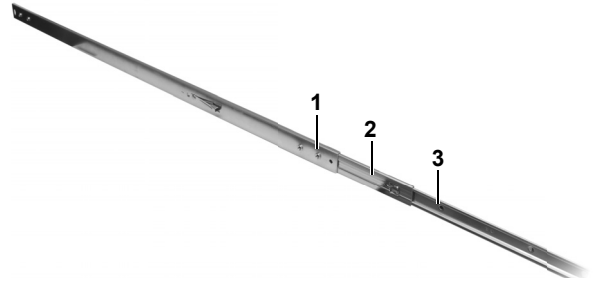


Follow the steps below to install the rack mount slide:

- 1 Remove the sliding rail from the rack mount slide.
  - a Extend the sliding rail until you hear a clicking sound indicating the sliding rail is locked.





3

- b Press the latch at the end of the inner channel with your thumb to unlock the sliding rail. Carefully slide and remove it from the rack mount slide.

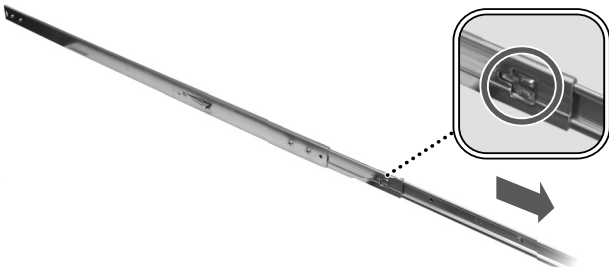

- c Repeat step a and b for the other rack mount slide.

- 2 Secure the sliding rail to your RackStation or expansion unit.
  - a Align the two  holes on the sliding rail with the two pegs on your RackStation or expansion unit.
  - b Position the sliding rail on the side of the unit.
  - c Slide the sliding rail slightly forward to engage the pegs in the short slots.

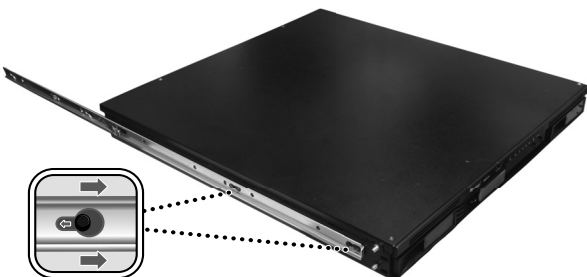


4

- d Use the black screw that came with your rail kit to secure the rail to the unit.



- e Repeat step a to d for the other rack mount slide.

- 3 Mount the brackets onto the outer channel.
  - a Compare the length of the outer channel with the depth of the rack to decide the proper location to place the brackets. Note that the front bracket is marked with "F" and the rear one is marked with "R".

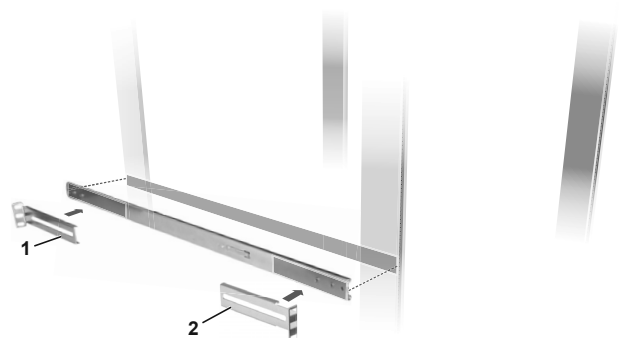

1. Rear bracket 2. Front bracket

- b Position the brackets to the ends of the outer channel, and secure them with black screws and washers.




- c Use the long screws that came with your rail kit to secure the outer channel to the posts of the rack.




**Note:** Depending on different types and depth of racks, you might need to use the short bracket to replace the bracket. For more information, see the Columbus 1U rack mount slide installation instruction that came with your rail kit.

- d Repeat step a to c for the other rack mount slide.

- 4 Insert your RackStation or expansion unit into the rack.  
a Guide the sliding rails on the sides of the unit into the inner channels of the rack mount slides.

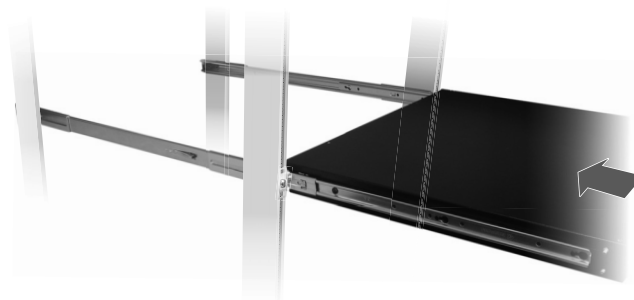

- b When you hear a clicking sound indicating the sliding rails are locked, pull the unit for 5 to 10 centimeters to reveal the latches at the end of the inner channels, and press the latches to unlock the sliding rails.

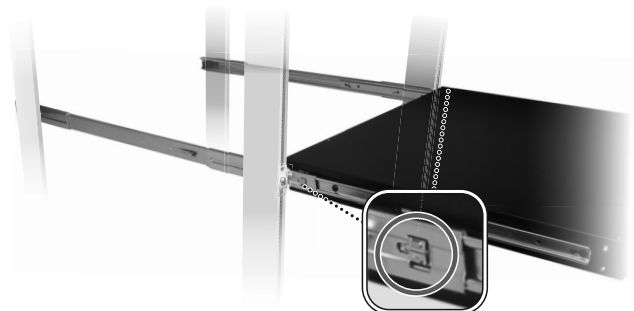

- c Push the unit all the way into the rack.




## Remove your RackStation or Expansion Unit from the Rack

- 1 Pull the RackStation or expansion unit until the latches at the end of the inner channels are revealed.



- 2 Press the latches to unlock the sliding rails, and carefully pull the unit out of the rack.

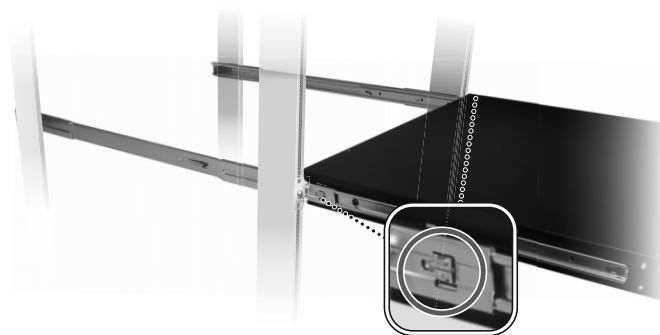

**SYNOLOGY INC.**  
www.synology.com

Copyright © 2010 Synology Inc. All rights reserved. Synology, the Synology logo, and other names of Synology Products are proprietary marks or registered trademarks of Synology Inc.

RailKitSliding04212010  
Printed in Taiwan

P/N: xxxxxxxx